
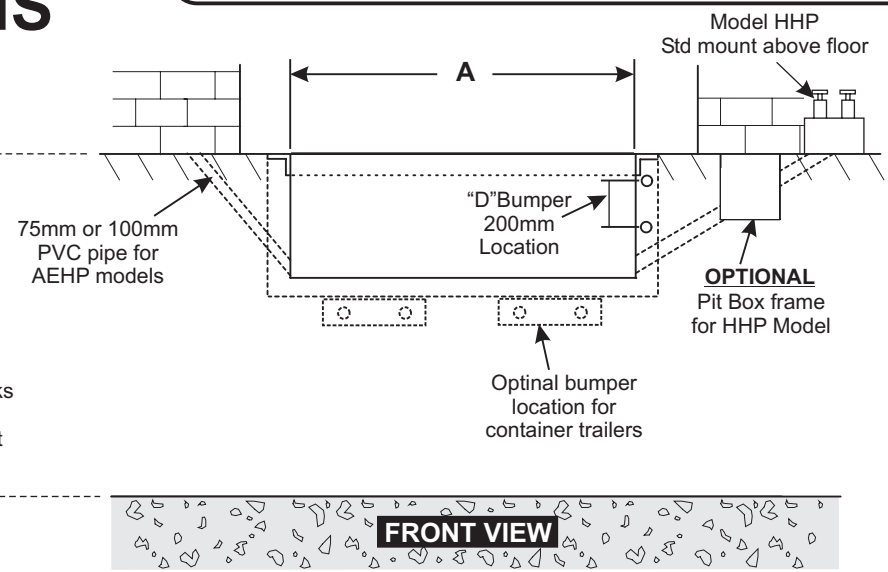



STANDARD DOCK LEVELLER

Customer _____
 Model _____ Job _____ Order.No. _____
 Power and Control Arrangement _____ Bumper Type _____
 Approved for Construction _____ Date _____

PIT DIMENSIONS

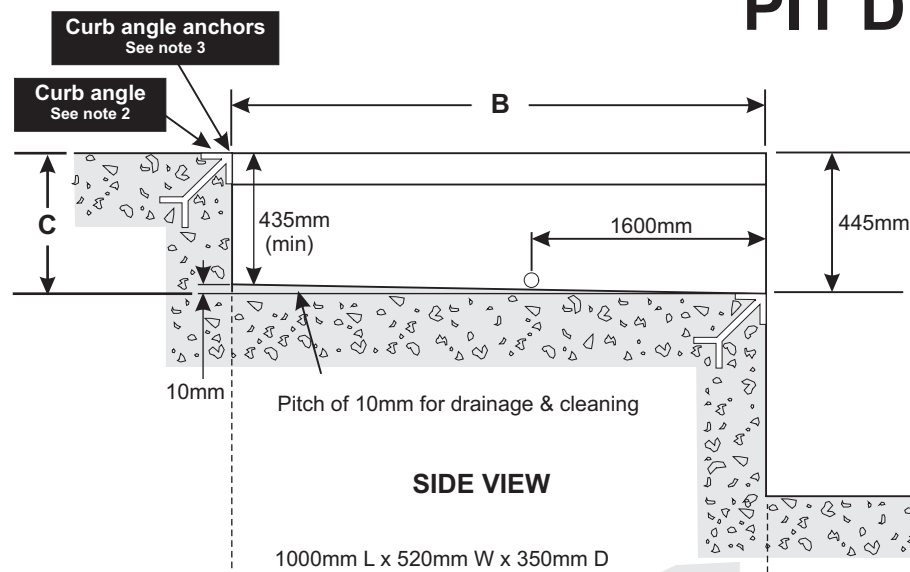

If your Dock height selection is not between 1100mm & 1350mm or 1400mm refrigerator trucks consult D.D.L. See separate available chart

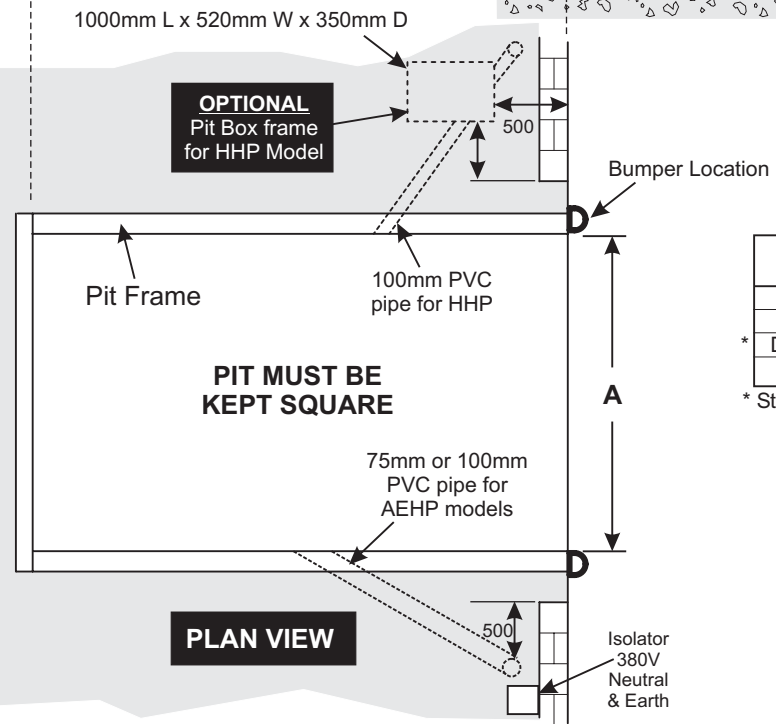

Model	A	B	C
	Width	Length	Depth
	1880	2210	445
	2185	2210	445
* DL1830*	1880mm	2820mm	445mm
	2185	2820	445

* Standard

HHP - Hand Hydraulic Pump
 AEHP - Automatic Electro Hydraulic Power Pack

NOTES:

To be supplied by the contractor:

- 1 Curb Angle - Use min 80 x 80 x 6mm } or D.D.L. to supply
 80 x 100 x 6mm. }
- 2 Curb Angle Anchor - Centre distance 600mm max.
- 3 Pit must be clear and access be provided for installation.
- 4 Grouting under entire frame and leaving an opening for drainage.

Ref: DE.29



D.D.L. EQUIPMENT cc
 P.O. Box 210, Strathavon, 2031
 Tel : +27 11 443-4233
 Fax : +27 11 882-4569
 E-Mail : ddl@icon.co.za
 Web Site: www.ddl.co.za
 Cell : 083 653 3872

"The Bridge That Links The Total Materials Handling Systems Together"