

DOCK SHELTER ISO-PANEL CONSTRUCTION

BY SPECIALIST PANELLING CONTRACTORS

Technical Data

TO SUITE:

D.D.L. EQUIPMENT

Contact Curtain Seals
with 800 mm projection
in front of dock face

OR:-

Inflatable Seals
with 800 mm projection
in front of dock face


DOCK DIMENSIONS

Customer _____ Installed at _____

Model _____ Job _____

_____ Bumper Type _____

Approved for Manufacture _____ Date _____

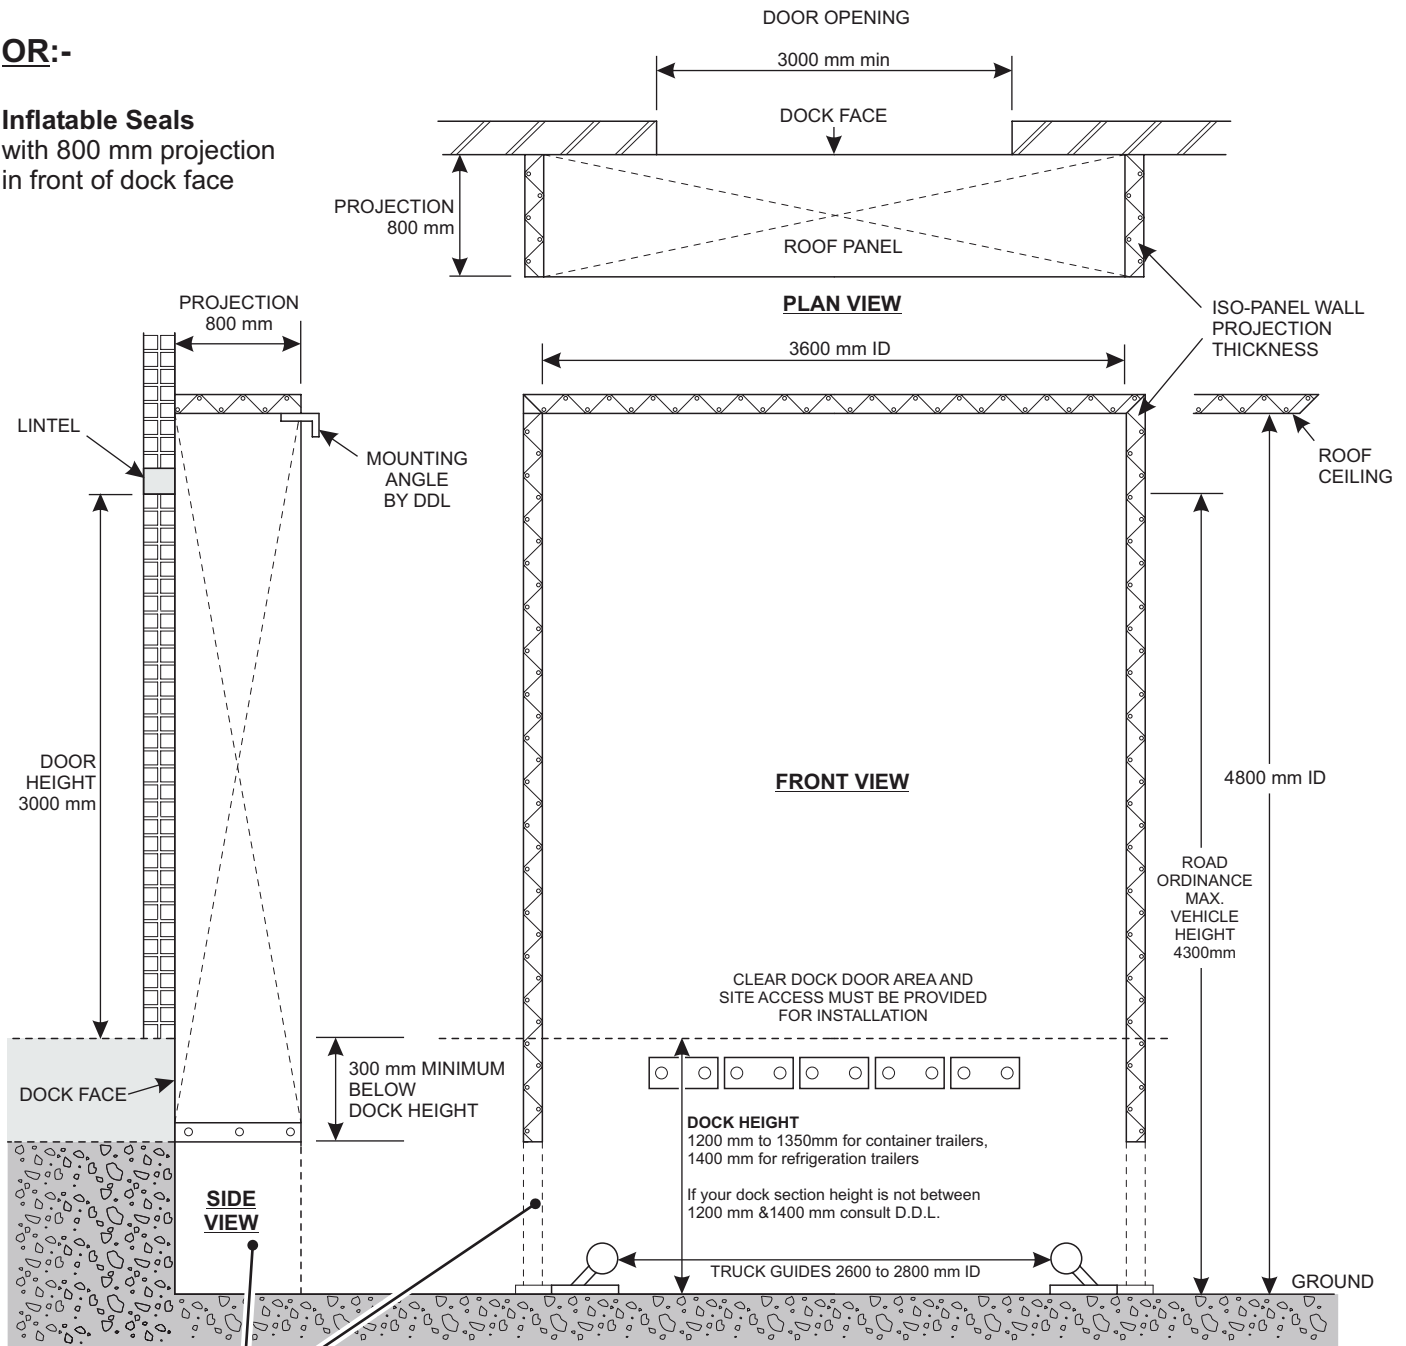

BELOW DOCK OPTIONS

1. Paneling all the way down to the ground.
2. 300 mm minimum below dock height.
3. Projection below dock height can be:
 - a. Concrete wall
 - b. Brick wall
 - c. Steel wall or steel support bracket
4. When free standing steel dock leveler unit combination is supplied by D.D.L. with a outside steel stand measurement of 3600 mm, Iso-panelling to be fixed against the stand, minimum 300 mm below dock height.

NOTE:
Specification and technical improvements
subject to change without notice.

DDL Equipment Pty Ltd

Reg No: 2005/043409/07

E-Mail: sales@ddl.co.za

Website: www.ddl.co.za

Tel: 011 393 1209

Fax: 011 393 1169

6 Neutron Road, Chloorkop, Kempton Park

