


**CORRECT**

# DOCK HEIGHT FOR CONTAINERS ON SKELETAL TRAILERS


And Docking Bay Door Opening

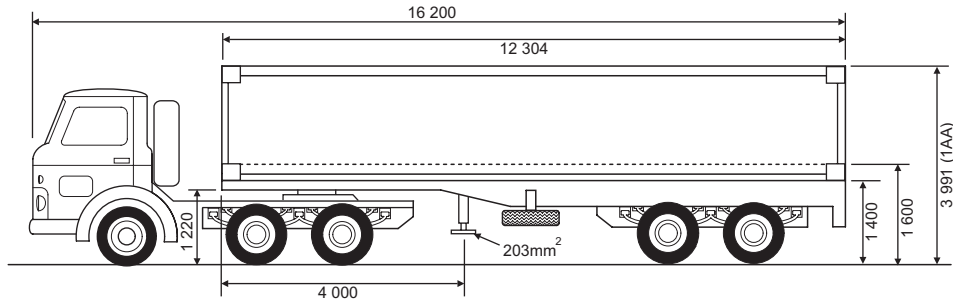


**12m Skeletal Semi-trailer**



And Correct Door Height to Allow Double Rear Doors to Open into and over Dock

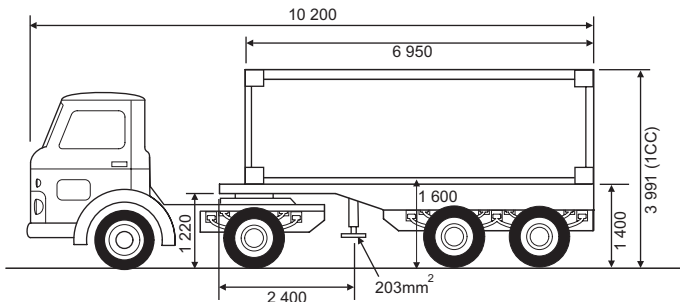


**6m Skeletal Semi-trailer**

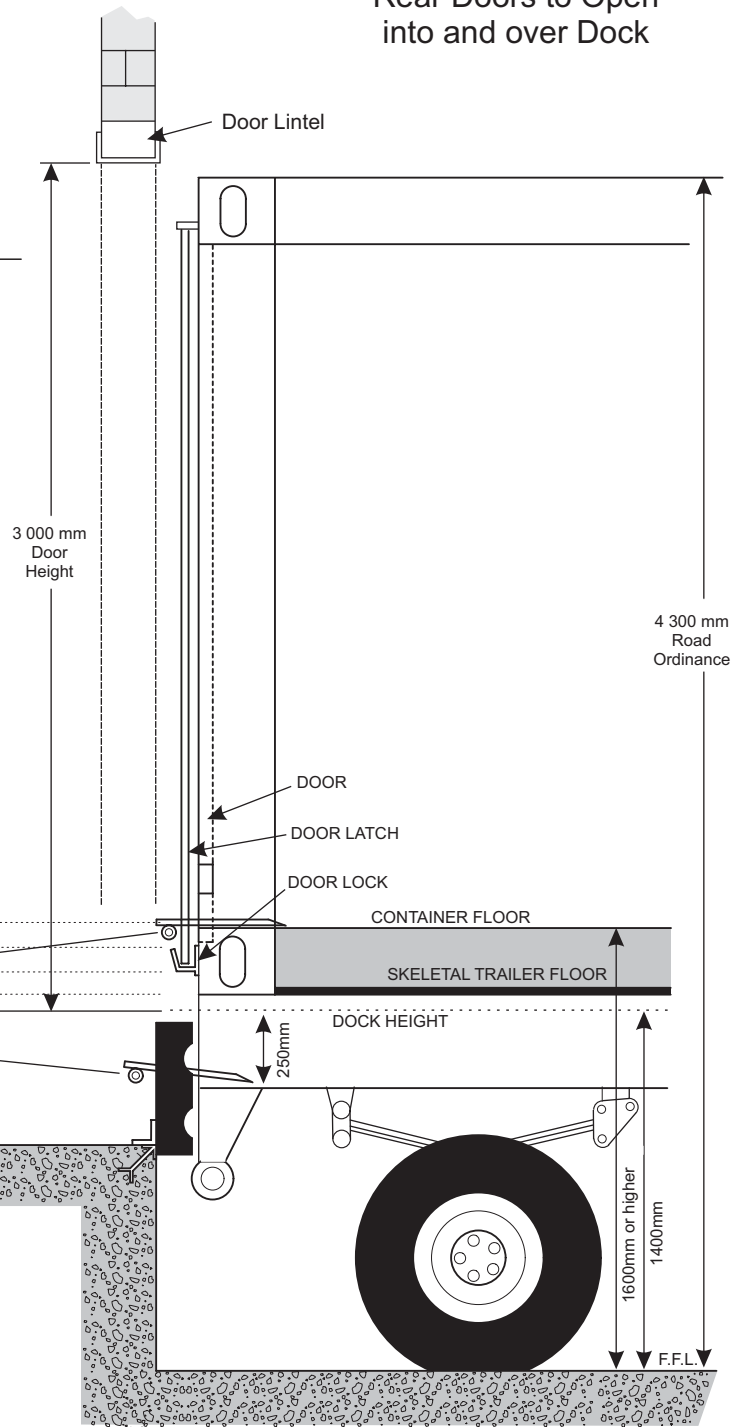

	6 Metre (20)	12 Metre (40)
Hauler	2 Axles	3 Axles
Capacity in containers	1 x 6m (20)	1 x 12m (40)
Overall length of trailer	6 950mm	12 304mm
Maximum width	2 500mm	2 500mm
Unladen height from ground level to top of container	3 991mm	3 991mm
Unladen height from ground level to top of face of twist lock	1 400mm	1 400mm
Downward deflection with load	65mm	65mm
Combined length	10 200mm	16 200mm
Distance from front of trailer to landing legs	2 400mm	4 000mm
Tare of trailer (approx)	3 250kg	5 850kg
Maximum payload	20 320kg	30 480kg
Turning circle	8 000mm	11 000mm
Parking area (herring or diagonal system)(approx)	150/ha	100/ha
Landing leg base dimensions	203mm <sup>2</sup>	203mm <sup>2</sup>

**Note:**  
Difference in Height

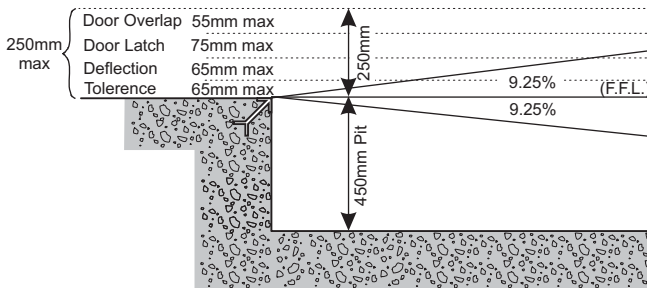

**D.D.L. EQUIPMENT cc**

P.O. Box 210, Strathavon, 2031  
Tel : +27 11 443-4233  
Fax : +27 11 882-4569  
E-Mail : ddl@icon.co.za  
Web Site: www.ddl.co.za  
Cell : 083 653 3872

F.F.L. - Finished Floor Level

"The Bridge That Links The Total Materials Handling Systems Together"

Ref: DE.30