

INFLATABLE SEAL



THE ULTIMATE DOCKING BAY SEAL



MEMBER OF
SOUTHERN AFRICAN REFRIGERATED
DISTRIBUTION ASSOCIATION



DOCK DIMENSIONS	
Customer _____	Installed at _____
Model _____	Job _____
_____	Bumper Type _____
Approved for Manufacture _____	Date _____

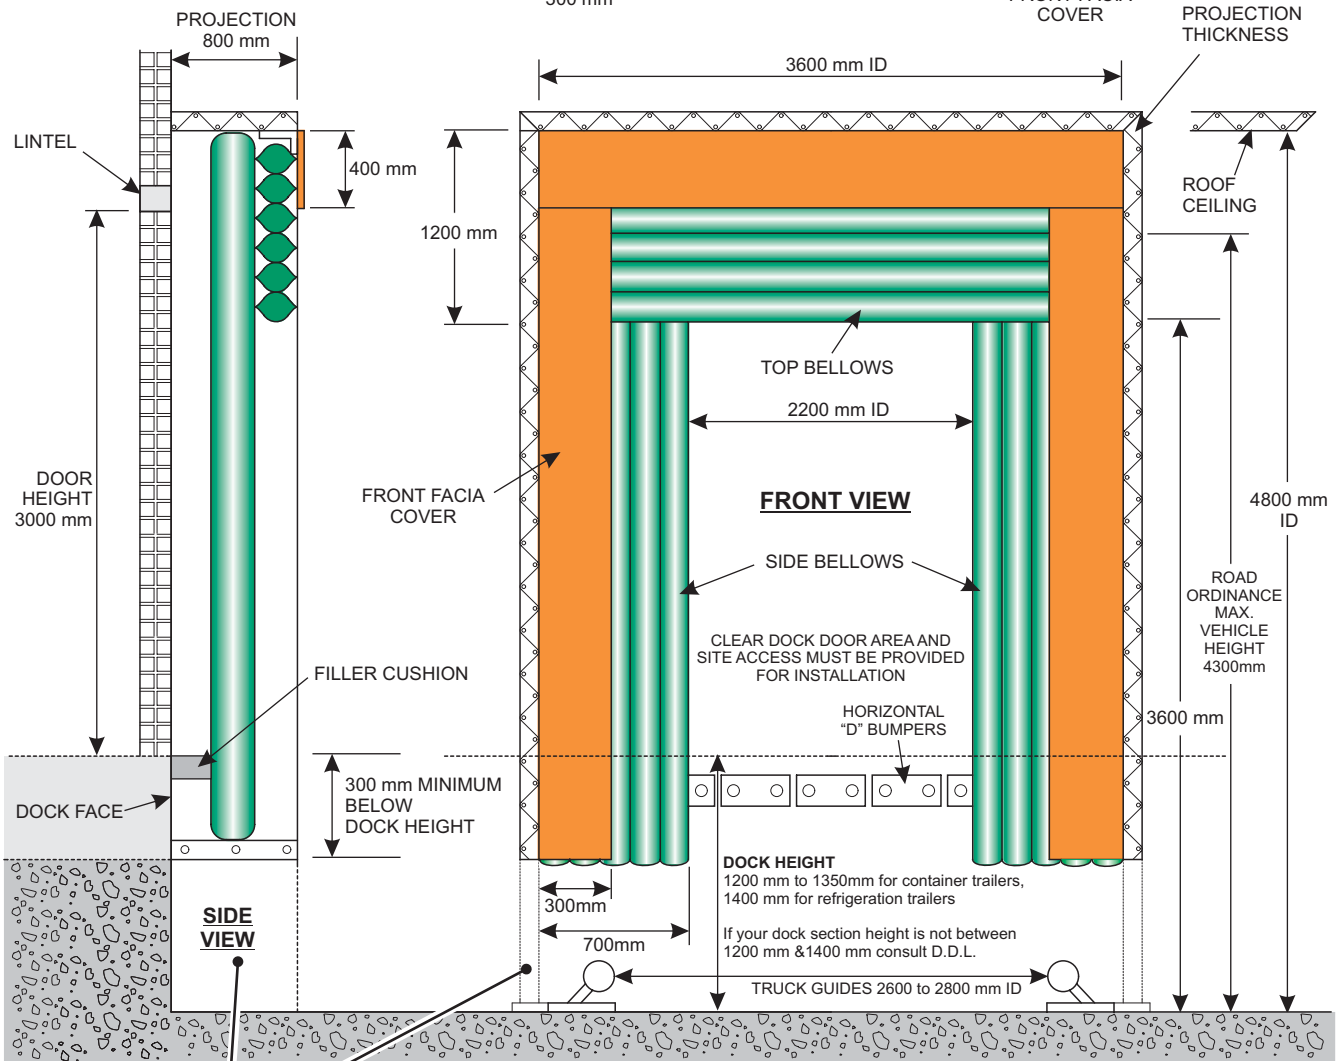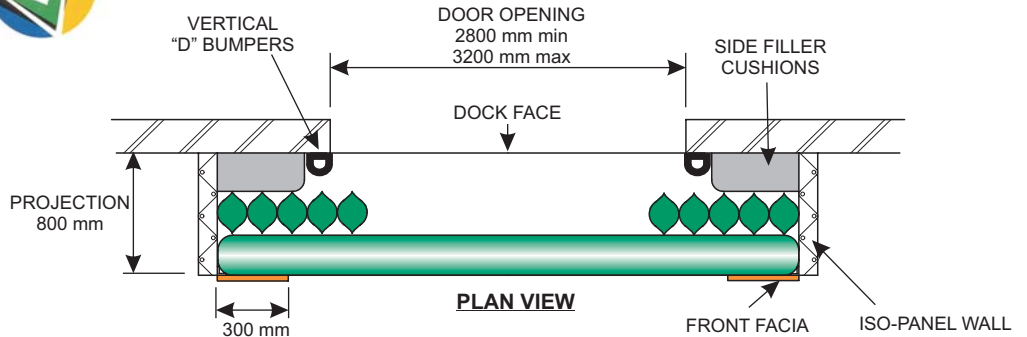

NOTE:
Specification and technical improvements
subject to change without notice.

BELOW DOCK OPTIONS

1. Paneling all the way down to the ground.
2. 300 mm minimum below dock height.
3. Projection below dock height can be:
 - a. Concrete wall
 - b. Brick wall
 - c. Steel wall or steel support bracket
4. When free standing steel dock leveler unit combination is supplied by D.D.L. with a outside steel stand measurement of 3600 mm, Iso-panelling to be fixed against the stand, minimum 300 mm below dock height.



D.D.L. EQUIPMENT cc

P.O. Box 210, Strathavon, 2031

Tel : +27 11 443-4233

Fax : +27 11 882-4569

E-Mail : ddl@icon.co.za

Web Site : www.ddl.co.za

Cell : 083 653 3872

"The Bridge That Links The Total Materials Handling Systems Together"

Ref: DSS.1