





CORRECT DOOR HEIGHT

TO ALLOW DOUBLE REAR DOORS TO OPEN INTO AND OVER DOCK
And Docking Bay Door Opening


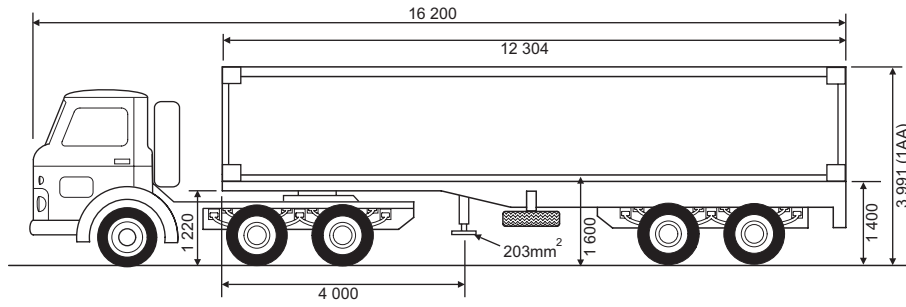


12m Skeletal Semi-trailer

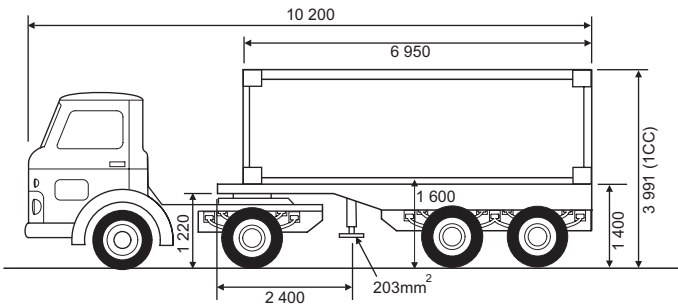

6m Skeletal Semi-trailer

	6 Metre (20)	12 Metre (40)
Hauler	2 Axles	3 Axles
Capacity in containers	1 x 6m (20)	1 x 12m (40)
Overall length of trailer	6 950mm	12 304mm
Maximum width	2 500mm	2 500mm
Unladen height from ground level to top of container	3 991mm	3 991mm
Unladen height from ground level to top face of twist lock	1 400mm	1 400mm
Downward deflection with load	65mm	65mm
Combined length	10 200mm	16 200mm
Distance from front of trailer to landing legs	2 400mm	4 000mm
Tare of trailer (approx)	3 250kg	5 850kg
Maximum payload	20 320kg	30 480kg
Turning circle	8 000mm	11 000mm
Parking area (herring or diagonal system) (approx)	150/ha	100/ha
Landing leg base dimensions	203mm ²	203mm ²

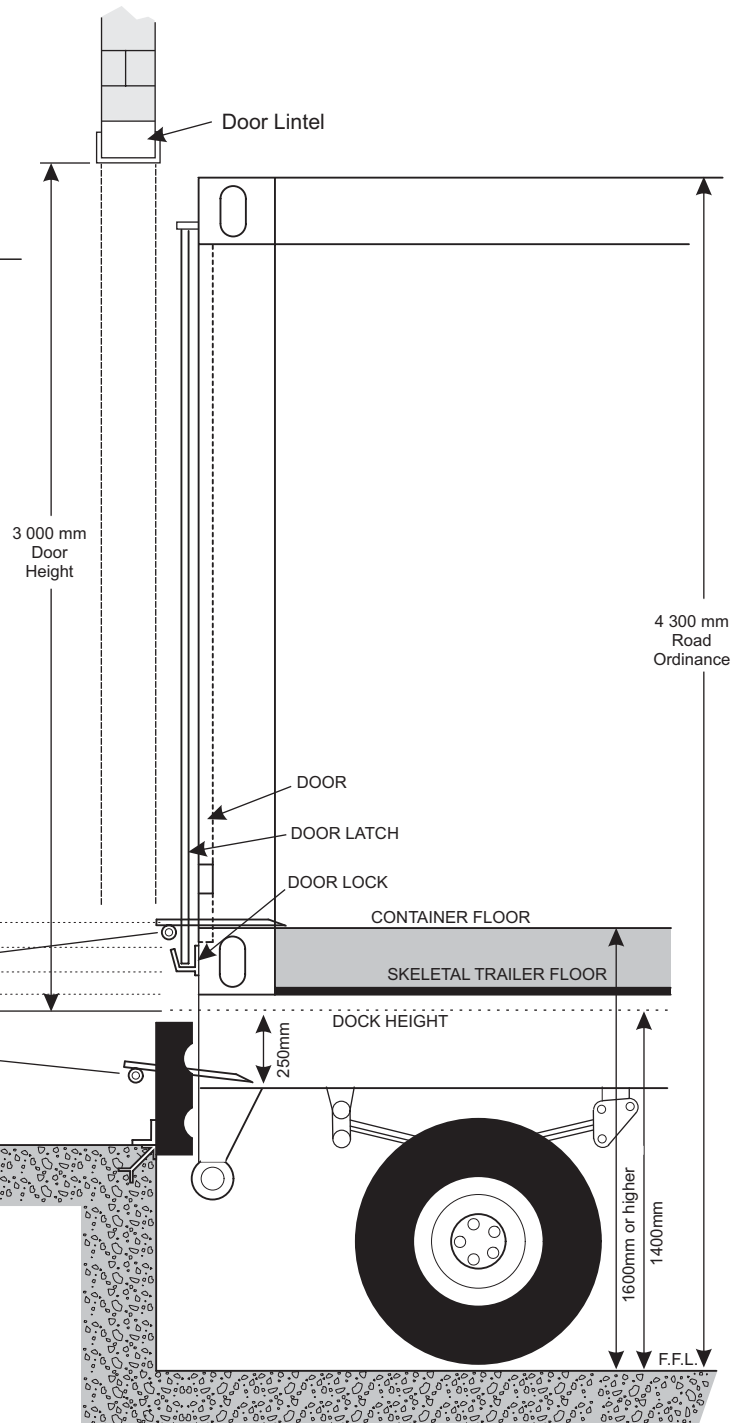

D.D.L. EQUIPMENT cc
 P.O. Box 210, Strathavon, 2031
 Tel : +27 11 443-4233
 Fax : +27 11 882-4569
 E-Mail : ddl@icon.co.za
 Web Site : www.ddl.co.za
 Cell : 083 653 3872

F.F.L. - Finished Floor Level