


# INFLATABLE SEAL

THE ULTIMATE DOCKING BAY SEAL

Technical Data


DOCK DIMENSIONS	
Customer _____	Installed at _____
Model _____	Job _____
_____	Bumper Type _____
Approved for Manufacture _____	Date _____

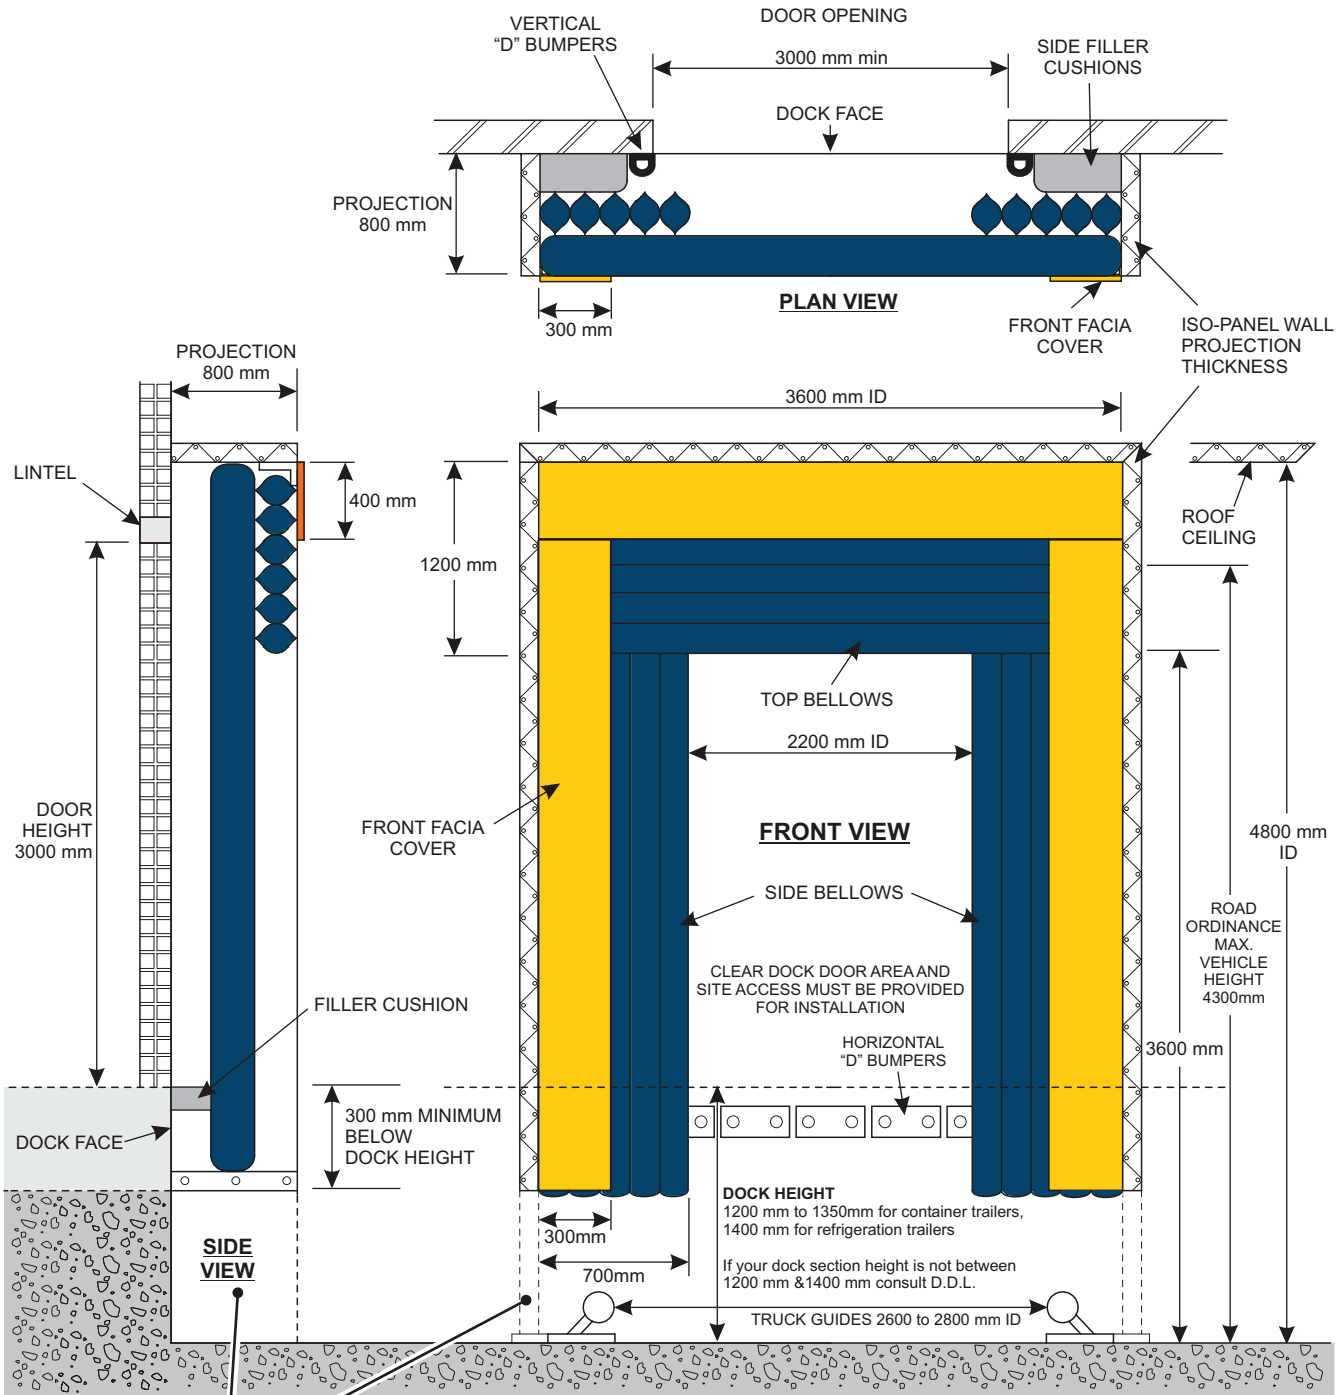

**NOTE:**  
Specification and technical improvements  
subject to change without notice.

**BELOW DOCK OPTIONS**

1. Paneling all the way down to the ground.
2. 300 mm minimum below dock height.
3. Projection below dock height can be:
  - a. Concrete wall
  - b. Brick wall
  - c. Steel wall or steel support bracket
4. When free standing steel dock leveler unit combination is supplied by D.D.L. with a outside steel stand measurement of 3600 mm, Iso-panelling to be fixed against the stand, minimum 300 mm below dock height.



**DDL Equipment Pty Ltd**

Reg No: 2005/043409/07

E-Mail: [sales@ddl.co.za](mailto:sales@ddl.co.za)

Website: [www.ddl.co.za](http://www.ddl.co.za)

Tel: 011 393 1209

Fax: 011 393 1169

6 Neutron Road, Chloorkop, Kempton Park

Ref: DSS.1