
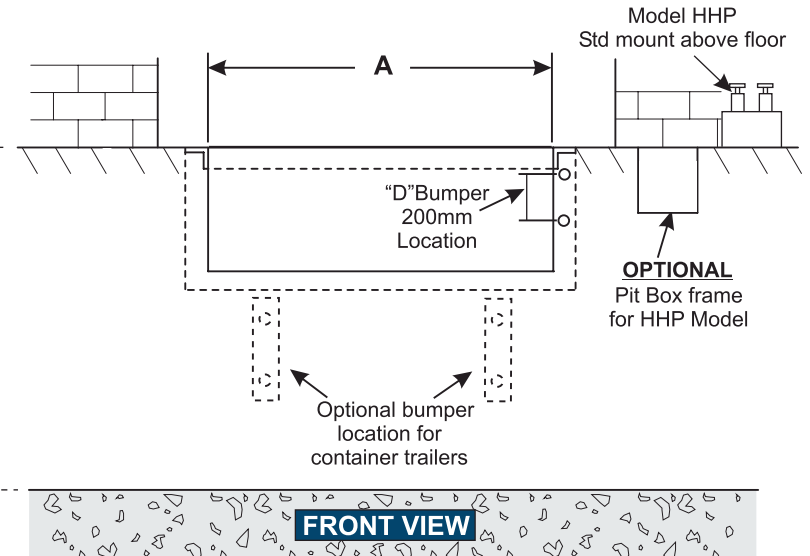
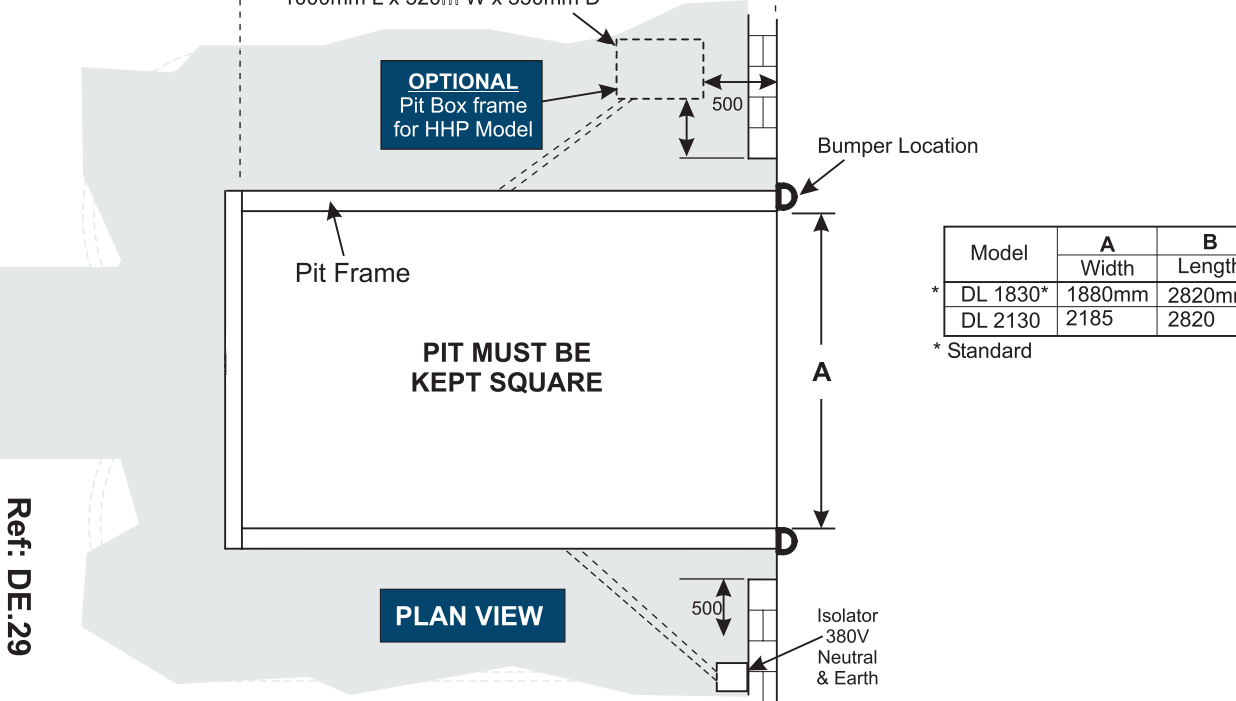


STANDARD DOCK LEVELLER

Customer _____
 Model _____ Job _____ Order.No. _____
 Power and Control Arrangement _____ Bumper Type _____
 Approved for Construction _____ Date _____

PIT DIMENSIONS

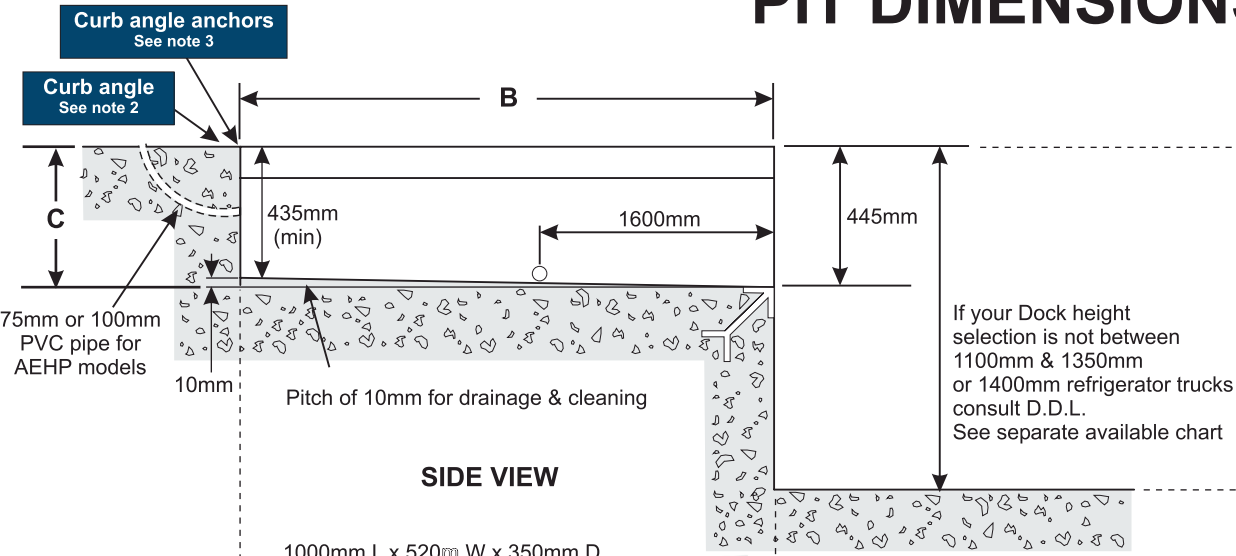

HHP - Hand Hydraulic Pump
EHP - Automatic Electro Hydraulic Power Pack

NOTES:

To be supplied by the contractor:

- 1 Curb Angle - Use min 80 x 80 x 6mm } or D.D.L. to supply
 80 x 100 x 6mm.
- 2 Curb Angle Anchor - Centre distance 600mm max.
- 3 Pit must be clear and access be provided for installation.
- 4 Grouting under entire frame and leaving an opening for drainage.

Model	A	B	C
	Width	Length	Depth
* DL 1830*	1880mm	2820mm	445mm
DL 2130	2185	2820	445

* Standard

Ref: DE.29

DDL Equipment Pty Ltd

Reg No: 2005/043409/07

E-Mail: sales@ddl.co.za

Website: www.ddl.co.za

Tel: 011 393 1209

Fax: 011 393 1169



TIME TESTED DOCKING

6 Neutron Road, Chloorkop, Kempton Park