
STANDARD DOCK LEVELLER

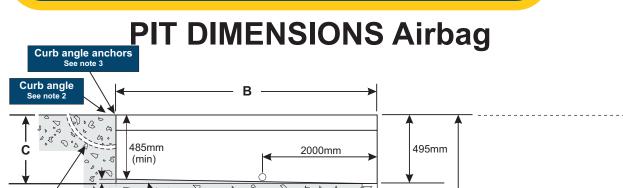

500

If your Dock height selection is not between 1100mm & 1350mm or 1400mm refrigerator trucks consult D.D.L. See separate available chart


Model

DL 1830*

DL 2130

Bumper Location

Technical Data

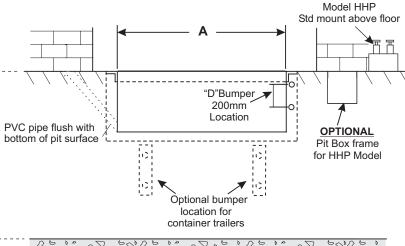

HHP - Hand Hydraulic Pump

EHP - Automatic Electro Hydraulic Power Pack

NOTES:

To be supplied by the contractor:

- 1 Curb Angle Use min 80 x 80 x 6mm 80 x 100 x 6mm. or D.D.L. to supply
- 2 Curb Angle Anchor Centre distance 600mm max.
- 3 Pit must be clear and access be provided for installation.
- 4 Grouting under entire frame and leaving an opening for drainage.

DDL Equipment Pty Ltd

Reg No: 2005/043409/07

E-Mail: sales@ddl.co.za Website:www.ddl.co.za

Tel: 011 393 1209 Fax:011 393 1169

TIME TESTED DOCKING 6 Neutron Road, Chloorkop, Kempton Park



С

Depth

495mm

495mm

Length

2820mm

2820mm

Width

1880mm

2185mm

Pit Frame

Pit Must BE KEPT SQUARE

PLAN VIEW

| Solution | Soluti

10mm | Pitch of 10mm for drainage & cleaning

SIDE VIEW

1000mm L x 520m W x 350mm D

OPTIONAL

Pit Box frame for HHP Model

PVC pipe for

AEHP models